



标记 (mark)	修改内容 (revised contents)	签名 (signature)	日期 (Date)
<1>			
<2>			


Front view

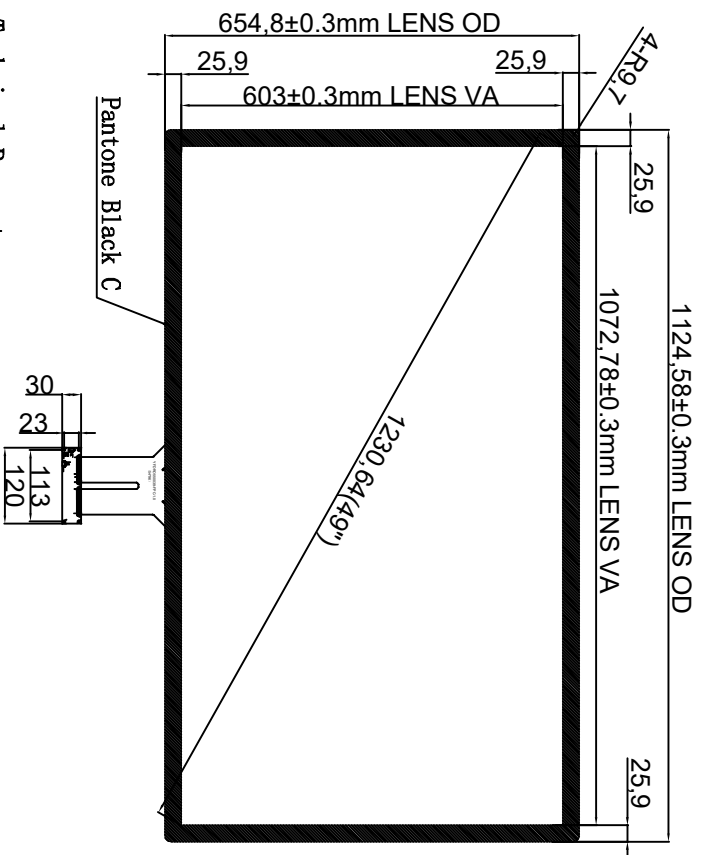

Side view

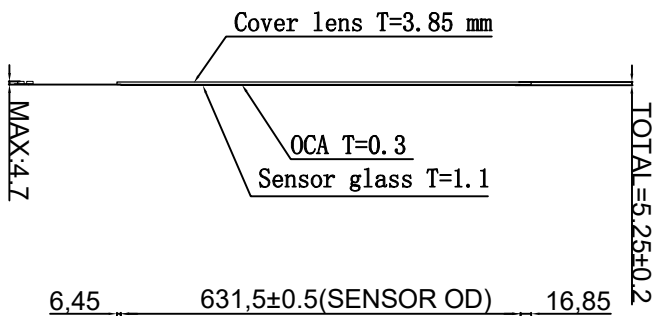

Back view

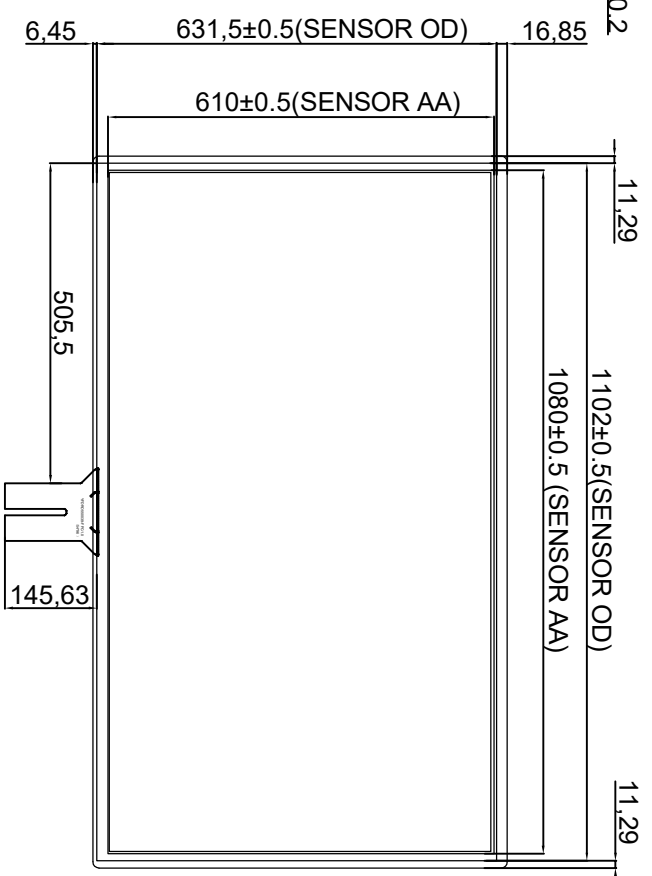

Technical Parameters

- 0: Interface :USB, I1I2315
- 1: Touch point: 10
- 2: Cover lens + Sensor glass + OCA + FPC
- 3: Cover lens Thickness = 3.85 mm
- 4: Sensor glass Thickness = 1.1mm
- 5: OCA Thickness = 0.3mm
- 6: Total Thickness = 5.25mm
- 7: Sensor Process: Print Process (ITO Pattern) + Laser line (Ag)
- 8: Input Voltage 3.5V~5.5V, Typical 5V
- 9: Transmittance:>85%
- 10: Surface Hardness:>6H
- 11: Relative Humidity:95% at 60°C, RH Non-condensing
- 12: Operating Conditions:-10 to 70 °C
- 13: Storage Conditions:-20 to 70 °C
- 14: Dimension tolerance:±0.5mm

东莞市越丰光电有限公司
Dongguan Yuefeng Photoelectric Co., Ltd

YFDR0490108

TITLE: 产品编号	YFDR0490108	CustomerId:		View: 投影方式	
Design By:		Unit:	mm	Scale:	1:1
Checked By:		Date:	20191212		
Approved By:					