



标记 (mark)	修改内容 (revised contents)	签名 (signature)	日期 (Date)
<1>			
<2>			


Front view

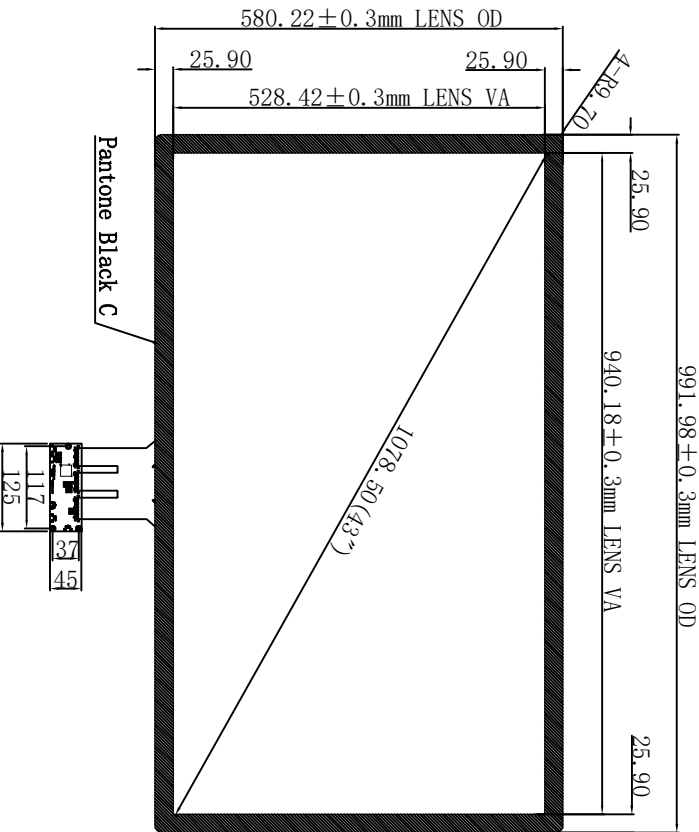

Side view

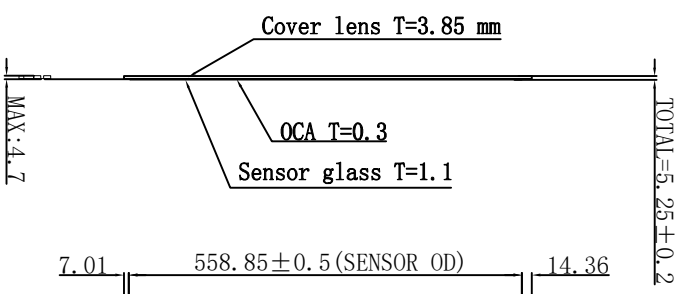

Back view

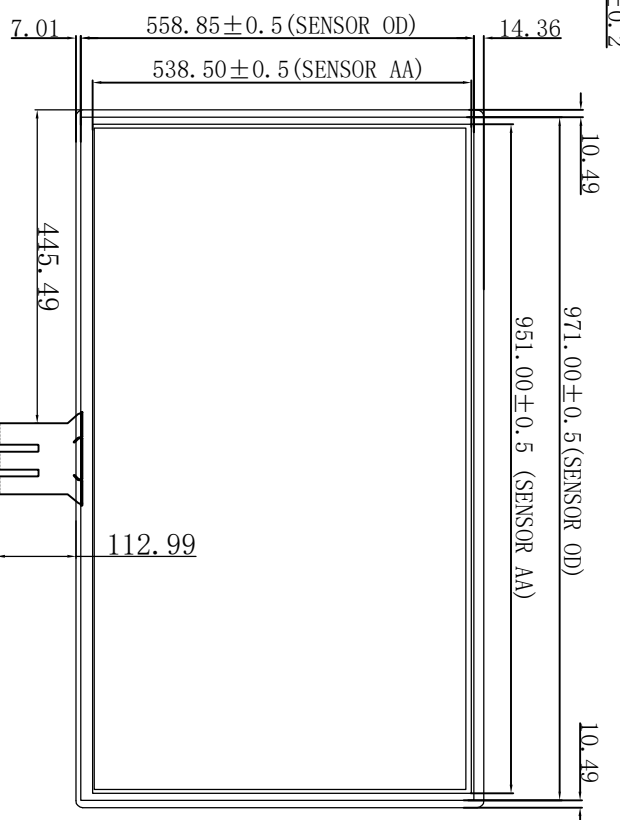

Technical Parameters

- 0: Interface :USB, ILLI2322
- 1: Touch point: 20
- 2: Cover lens + Sensor glass + OCA + FPC
- 3: Cover lens Thickness = 3.85 mm
- 4: Sensor glass Thickness = 1.1mm
- 5: OCA Thickness = 0.3mm
- 6: Total Thickness = 5.25mm
- 7: Sensor Process: Print Process (ITO Pattern) + Laser line (Ag)
- 8: Input Voltage 3.5V~5.5V, Typical 5V
- 9: Transmittance:>85%
- 10: Surface Hardness:>6H
- 11: Relative Humidity:95% at 60°C, RH Non-condensing
- 12: Operating Conditions:-10 to 70 °C
- 13: Storage Conditions:-20 to 70 °C
- 14: Dimension tolerance:±0.5mm

东莞市越丰光电有限公司
Dongguan Yuefeng Photoelectric Co., Ltd

YFDR0430513

TITLE: 产品编号	YFDR0430513	Customerid: 客户编号	View: 投影方式
设计		Unit: 单位	mm
Checked By: 审核		Date: 日期	20191212
Approved By: 批准		Scale: 比例	1:1

A

B

C

E

F

G