
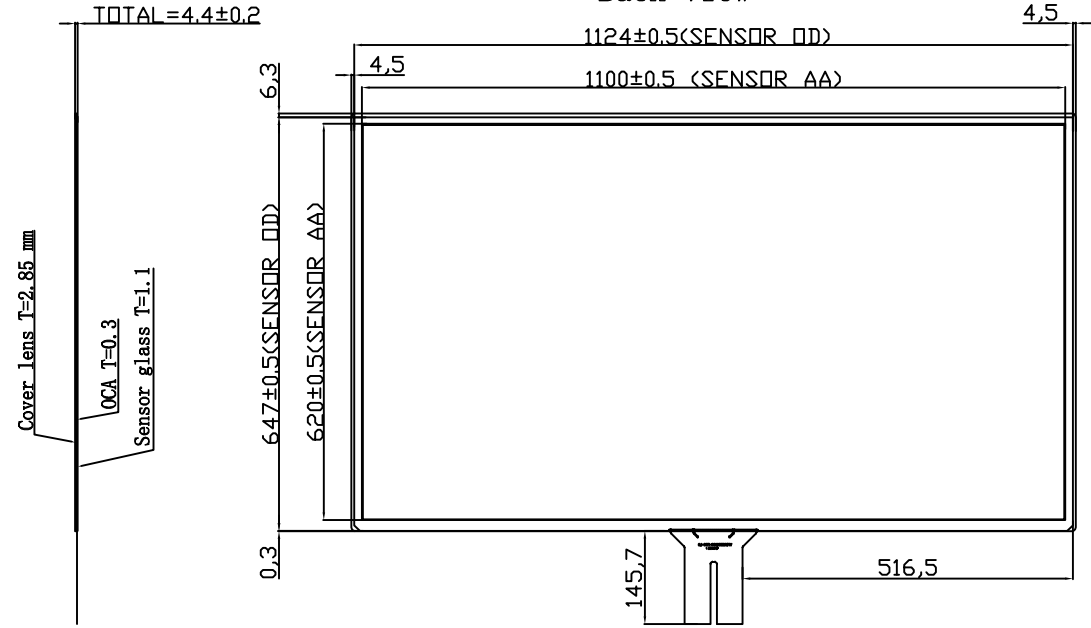


| 标记(mark) | 修改内容(revised contents) | 签名(signature) | 日期(Date) |
|----------|------------------------|---------------|----------|
| <1> | | | |
| <2> | | | |

Front view

Side view

Back view

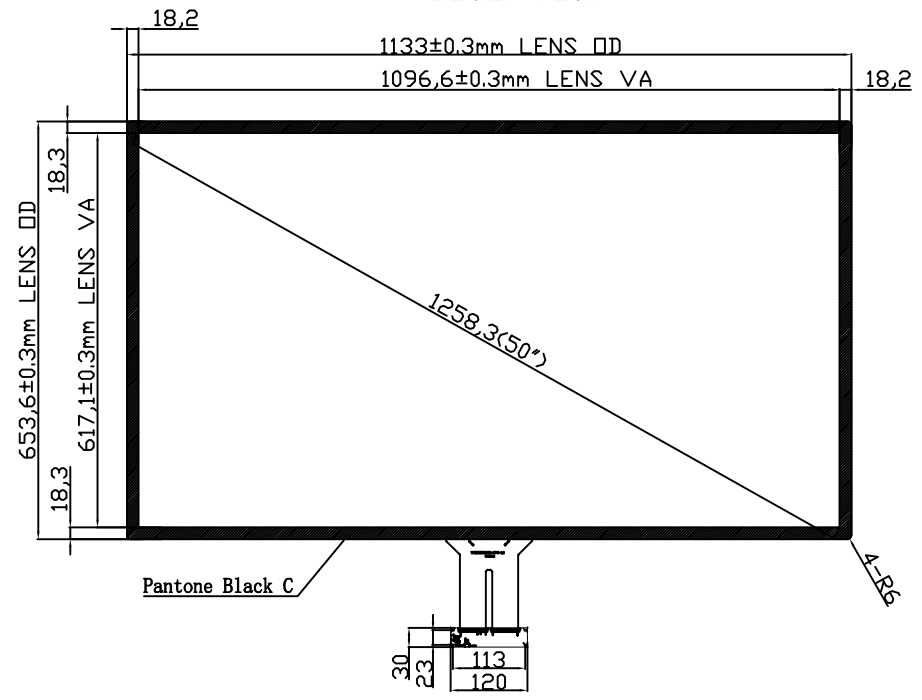

Technical Parameters

- 0: Interface :USB, IL12315
- 1: Touch point: 10
- 2: Cover lens + Sensor glass + OCA + FPC
- 3: Cover lens Thickness = 2.85 mm
- 4: Sensor glass Thickness = 1.1mm
- 5: OCA Thickness = 0.3mm
- 6: Total Thickness = 4.3mm
- 7: Sensor Process: Print Process (ITO Pattern) + laser line(Ag)
- 8: Input Voltage 3.5V~5.5V, Typical 5V
- 9: Transmittance:>85%
- 10: Surface Hardness:>6H
- 11: Relative Humidity:95% at 60°C, RH Non-condensing
- 12: Operating Conditions:-10 to 70 °C
- 13: Storage Conditions:-20 to 70 °C
- 14: Dimension tolerance:±0.2mm

东莞市越丰光电有限公司

| | | | | |
|--------------------|---------------------|----------|---------------|-----|
| TITLE: 产品编号 | YFDR050004 | | | |
| Designed By: 设计 | Customerid: 客户编号 | | View: 投影方式 | |
| Checked By: 审核 | Unit: 单位 | mm | | |
| Approved By: 批准 | Date: 日期 | 20191212 | Scale: 比例 | 1:1 |

由 Autodesk 教育版产品制作

由 Autodesk 教育版产品制作