



标记 (mark)	修改内容 (revised contents)	签名 (signature)	日期 (Date)
<1>			
<2>			


### Front view

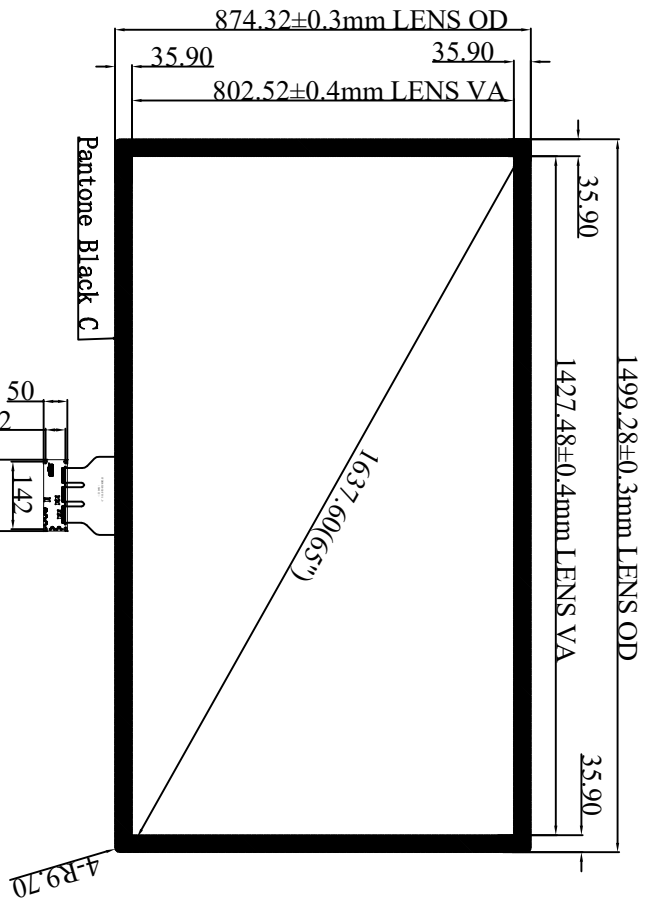

### Side view

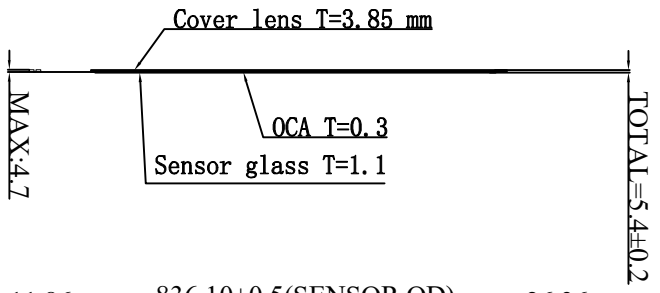

### Back view

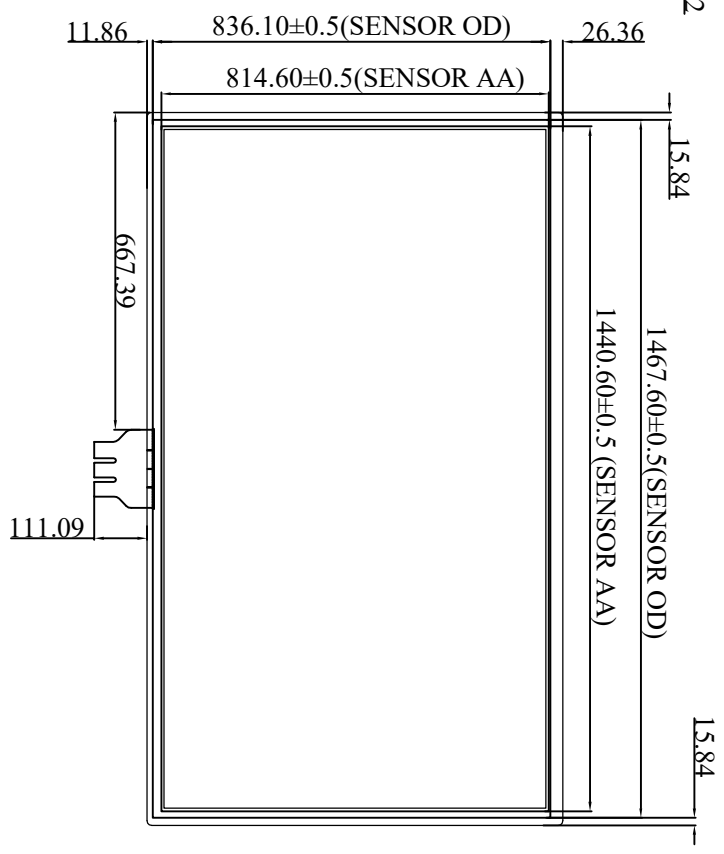

- Technical Parameters**
- 0: Interface :USB, ILI2323
  - 1: Touch point:20
  - 2: Cover lens + Sensor glass + OCA + FPC
  - 3: Cover lens Thickness = 3.85 mm
  - 4: Sensor glass Thickness = 1.1mm
  - 5: OCA Thickness = 0.3mm
  - 6: Total Thickness = 5.25mm
  - 7: Sensor Process: Print Process (ITO Pattern) + laser line (Ag)
  - 8: Input Voltage 3.5V~5.5V, Typical 5V
  - 9: Transmittance:>85%
  - 10: Surface Hardness:>6H
  - 11: Relative Humidity:95% at 60°C, RH Non-condensing
  - 12: Operating Conditions:-10 to 70 °C
  - 13: Storage Conditions:-20 to 70 °C
  - 14: Dimension tolerance:±0.5mm

东莞市越丰光电有限公司  
Dongguan Yuefeng Photoelectric Co., Ltd

TITLE: 产品编号	YFDR0650080		
Design By:	Customerid:	View:	投影方式
Checked By:	Unit:	mm	
Approved By:	Date:	20191212	Scale:
批准	日期		比例